

Rugged DC Motors

Remanufactured By GlobalTech Motor & Controls



STANDARD FEATURES


- Single Shaft Extension with Oilfield Drilling Hub
- XP Heaters
- Pressurized Junction box with double bolt-on cable connections and terminations for motor auxiliaries
- Pressure Switch
- Class H Insulation
- 10HP-3600RPM "Predator" Cooling Blower

Marine features also include:

- Explosion proof Pressure Switch
- Armored Cable
- Two 100ohm platinum RTD's
- ABS Certified Shaft

OPTIONAL FEATURES

- BASEEFA Certification
- Encoder
- ABS Certification
- Stainless Steel Junction Box
- 15HP-3600RPM "Predator" Cooling Blower
- GlobalTech "Silent Predator" Cooling Blower
- Exhaust Manifolds / Spark Arrestor
- Closed-Loop Cooling System

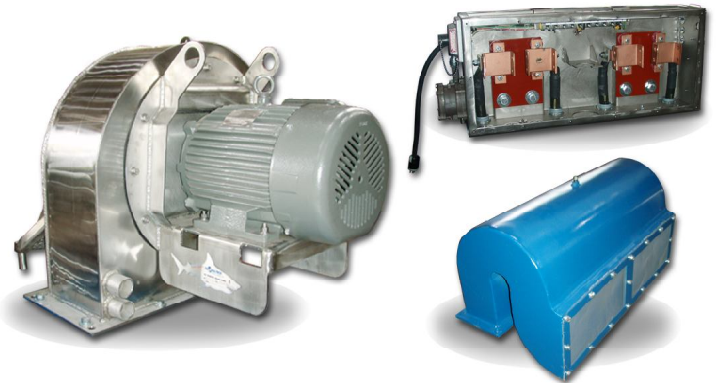

Globaltech Motor & Controls, Inc. sells & remanufactures many types of rugged DC Traction Motors, with the highest quality and reliability. We specialize in the Rewind, Redesign, and Remanufacturing of large industrial vector duty electric motors for heavy industry. We thoroughly test all remanufactured motors utilizing Core Testing, Hipot testing, Load Testing and high speed test runs to ensure your motor will operate at its optimum level.

PERFORMANCE RATINGS

Globaltech's remanufactured **GE 752 Hi-Torque** DC Drilling Motor with 2800 SCFM air flow and ABS temperature rise standards of 155 rise at 40 C ambient.

	Continuous Max. HP	Continuous Max Torque	Continuous Duty Cycle
SHUNT			
Volts (dc)	750	650	750
Arm amps	1185	1250	1435
Field amps	60	60	60
RPM	1040	900	1065
Torque (lb ft)	5705	5995	6745
HP	1130	1030	1365
SERIES			
Volts (dc)	750	570	750
Arm amps	1150	1250	1400
RPM	965	700	920
Torque (lb ft)	5900	6620	7530
HP	1085	880	1320

WWW.GLOBALTECHMOTORS.COM

24-HR PHONE: 281-487-9300

2510 E. Sam Houston Parkway S., Pasadena, TX 77503, USA

E-mail: Sales@globaltechmotors.com / Fax: 281-487-9305

